


Lifting / Erection SPREAD Anchor WITH PLASTIC CAP

The capacity loads are axial with breakage factor of safety equal to 3.

Material : St 52.3 (S355J2G3)
 Finishing : anchor black the head cold
 dipped galvanized (CDG).

The capacity loads are axial with breakage factor of safety equal to x 3 the working load. Finishing : Zinc Plated (ZP), on request.

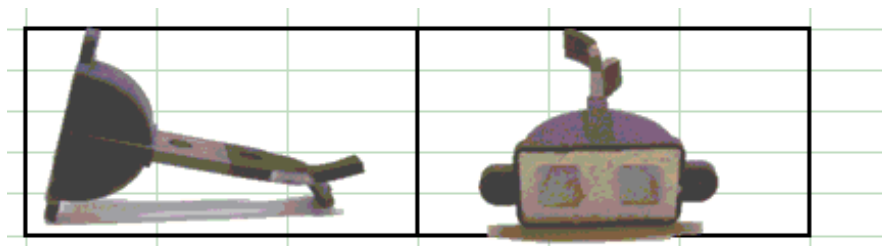

HAEP-1, 25-120-SB

HAEP black/CDG	Load Group Tonnes	Axial Capacities Load Kg	Length L mm	
HAEP-1,25-120-SB	1,25	1.250	120	Pre-Mounted with plastic former and polystyrene cap