


FCC - Female Connection Coupler

Has external thread to produce the male end coupler type : FRC

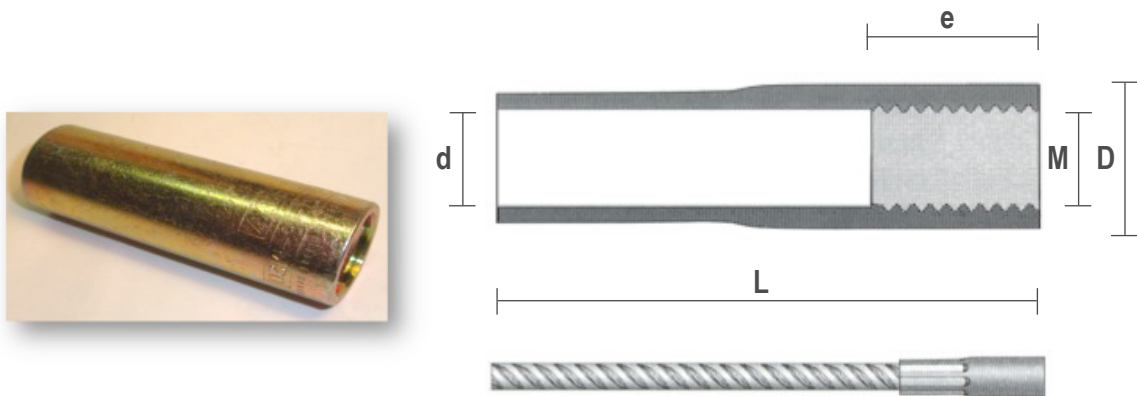

FCC-ZP	FCC-400-SB	Length L mm	Diam. rebar	Thread metric M	Thread e mm	diameter		Weight Kg/pc
						D mm	d mm	
FCC-10-M12-ZP	FCC-10-M12-400-SB	47	10	M 12	20	18	12	0,045
FCC-12-M16-ZP	FCC-12-M16-400-SB	58	12	M 16	27	22	15	0,090
FCC-14-M18-ZP	FCC-14-M18-400-SB	70	14	M 18	31	26	17	0,100
FCC-16-M20-ZP	FCC-16-M20-400-SB	80	16	M 20	35	27	19	0,160
FCC-18-M22-ZP	FCC-18-M22-400-SB	86	18	M 22	38	31	22	0,220
FCC-20-M24-ZP	FCC-20-M24-400-SB	92	20	M 24	41	33	24	0,335
FCC-22-M27-ZP	FCC-22-M27-400-SB	100	22	M 27	45	37	26	0,400
FCC-25-M30-ZP	FCC-25-M30-400-SB	110	25	M 30	50	41	29	0,565
FCC-26-M33-ZP	FCC-26-M33-400-SB	117	26	M 33	54	46	31	0,700
FCC-28-M36-ZP	FCC-28-M36-400-SB	125	28	M 36	60	48	34	0,915
FCC-30-M36-ZP	FCC-30-M36-400-SB	125	30	M 36	60	52	36	1,225
FCC-32-M42-ZP	FCC-32-M42-400-SB	149	32	M 42	65	57	38	1,225
FCC-34-M42-ZP	FCC-34-M42-400-SB	149	34	M 42	65	60	40	1,500
FCC-40/43-M48-ZP	FCC-40/43-M48-400-SB	182	40 / 43	M 48	78	67	47	1,800

Material : coupler steel St 52.3 zinc plated (ZP) or shot blast (SB).