


## MCC - Male Connection Coupler

Has external thread to produce the male end coupler type : MRC

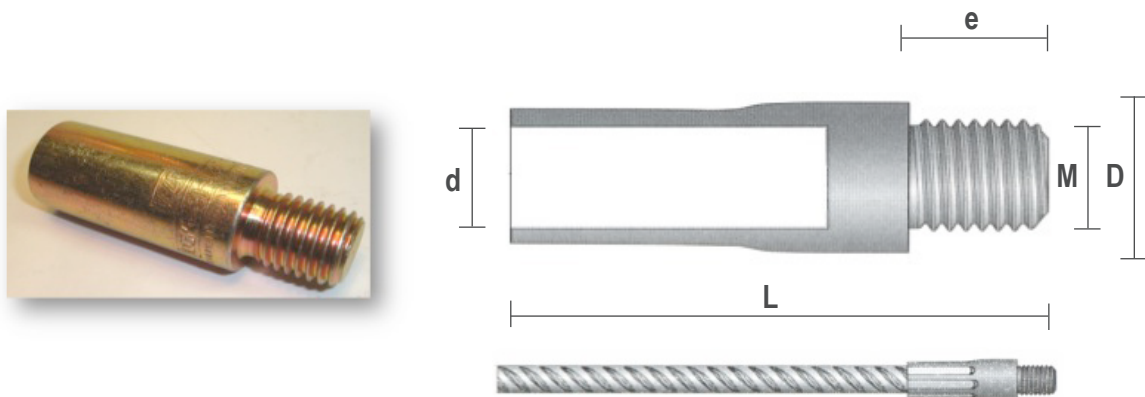

MCC-ZP	MCC-400-SB	Length L mm	Diam. rebar	Thread metric M	Thread e mm	diameter		Weight Kg/pc
						D mm	d mm	
MCC-10-M12-ZP	MCC-10-M12-400-SB	47	10	M 12	14	18	12	0,045
MCC-12-M16-ZP	MCC-12-M16-400-SB	58	12	M 16	18	22	15	0,090
MCC-14-M18-ZP	MCC-14-M18-400-SB	70	14	M 18	20	26	17	0,100
MCC-16-M20-ZP	MCC-16-M20-400-SB	80	16	M 20	22	27	19	0,160
MCC-18-M22-ZP	MCC-18-M22-400-SB	86	18	M 22	25	31	22	0,220
MCC-20-M24-ZP	MCC-20-M24-400-SB	92	20	M 24	27	33	24	0,335
MCC-22-M27-ZP	MCC-22-M27-400-SB	100	22	M 27	30	37	26	0,400
MCC-25-M30-ZP	MCC-25-M30-400-SB	110	25	M 30	33	41	29	0,565
MCC-26-M33-ZP	MCC-26-M33-400-SB	117	26	M 33	36	46	31	0,700
MCC-28-M36-ZP	MCC-28-M36-400-SB	125	28	M 36	40	48	34	0,915
MCC-30-M36-ZP	MCC-30-M36-400-SB	125	30	M 36	40	52	36	1,225
MCC-32-M42-ZP	MCC-32-M42-400-SB	149	32	M 42	46	57	38	1,225
MCC-34-M42-ZP	MCC-34-M42-400-SB	149	34	M 42	46	60	40	1,500
MCC-40/43-M48-ZP	MCC-40/43-M48-400-SB	182	40 / 43	M 48	53	67	47	1,800

Material : coupler steel St 52.3 zinc plated (ZP) or shot blast (SB).